

Overview:

KERATHERM® thermally conductive silicone free ceramic-filled film series are designed to be highly conductive that provide well-balanced thermal, electrical, dielectric behaviour providing a thin bond-line for use in application that are concerned about silicone contamination.

Applications:






- Aerospace ■ Automotive ■ Laser Equipment ■ Lighting Systems ■ Medical Equipment ■ Disk Drives
- Telecommunication ■ CD-ROM Drives ■ HAMR ■ Optical Devices ■ Power Converter



Non-Reinforced Thermally Conductive Silicone Free Film

Properties	Unit	MT 102	MT 103	U 80	U 85	U90	Test Method
Colour	-	Blue	Red	Blue	Light Blue	Light Blue	Visual
Reinforcement	-	None	None	None	None	None	Visual
Thermal Properties							
Thermal resistance R_{th}	K/W	0.53	0.39	0.2	0.165	0.082	Kerafol
Thermal impedance R_{ti}	$^{\circ}\text{Cmm}^2/\text{W}$	200	156	73	60.2	32.9	Kerafol
	Kin^2/W	0.28	0.21	0.11	0.091	0.05	Kerafol
Thermal conductivity λ	W/m-K	1.1	1.8	1.8	3.0	6	ASTM D5470
Electrical Properties							
Breakdown voltage $U_{d;ac}$	kV	10	10	4	6.0	4	ASTM D149
Dielectric breakdown $E_{d;ac}$	kV/mm	25	25	25	30	25	ASTM D149
Volume resistivity	Ωm	2.2×10^{10}	4.7×10^{10}	1.44×10^{14}	4.08×10^9	2.0×10^{11}	ASTM D257-3
Dielectric loss factor $\tan \sigma$	1	1.0×10^{-3}	1.0×10^{-3}	13×10^{-3}	26×10^{-3}	13.7×10^{-3}	ASTM D150
Dielectric constant ϵ_r	1	2.68	2.61	3.2	1.96	3.1	ASTM D150
Mechanical Properties							
Measured thickness (+/-10%)	mm	0.250	0.280	0.150	0.200	0.200	ASTM D734
Hardness	Shore A	65 - 75	70 - 80	80 - 90	70 - 85	70 - 80	ASTM D2240
Tensile strength	N/mm^2	2	2	3	-	2	ASTM D412
Elongation	%	>1000	200	130	-	150	ASTM D412
Physical Properties							
Operating temperature	$^{\circ}\text{C}$	-40 to +125	-40 to +125	-40 to +125	-40 to +150	-40 to +150	Kerafol
Density	g/cm^3	1.87	1.88	2.26	1.44	1.46	Kerafol
Flame rating	UL 94	VO	VO	VO	VO	VO	U.L. E140693
Total Mass Loss (TML)	Ma.-%	-	-	-	-	-	ASTM E 595
Thickness available	mm	0.250	0.280	0.150, 0.300	0.125, 0.200, 0.300	0.100, 0.200, 0.300	Kerafol

* Data provided are nominal values that should not be used to write specifications. Users are advised to test and decide the suitability of the product to fit their applications.

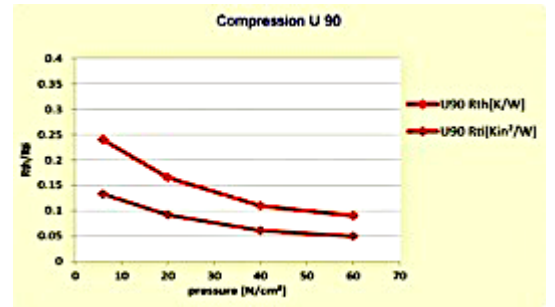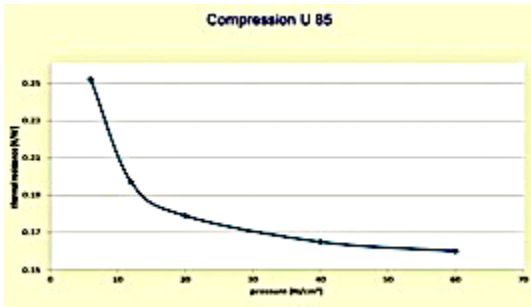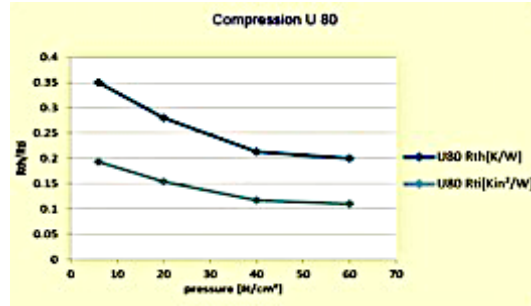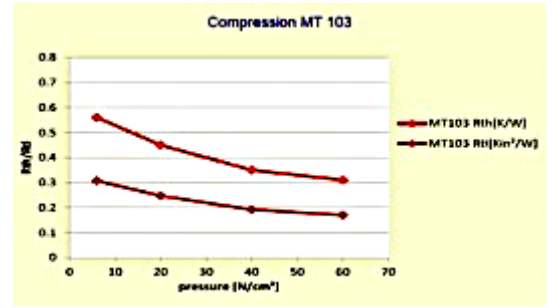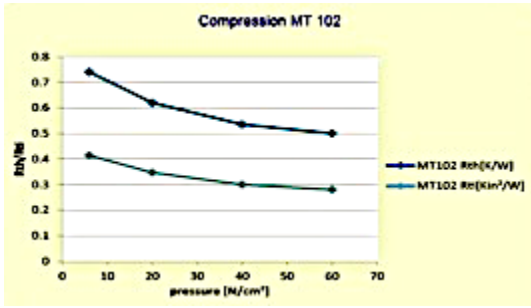

For Technical Service Support and Supplies : Contact Our Key Asia Distributor and Converter:

Everjoy Industrial Supplies Pte. Ltd.

38 Woodlands Industrial Park E1, #04-11 Singapore 757700

Tel.: +65 6748 3093

Fax: +65 6748 7202

Email: salesmngt@everjoy.com.sg